

The Original

TELE-LITE[®] INC

ROCHESTER, NEW YORK



TELE-LITE
TELE-AIRE
HONDA POWER
HONDA MARINE
SABRE-VENT

HONDA
GENERATORS & PUMPS

HONDA
MARINE



TOLL FREE:
800.538.0022
TELE-LITE.COM >



Single 500W, Model 5TL
8.5"W x 8.5"H x 5.5"D



SINGLE 1500W MODEL-10/15
16.5"W x 9.5"H x 5.5"D



Double LED Model (2) TL6
18.5"W x 12"H x 5.5"D

TELE-LITE's are manufactured to the highest standards of quality.

High intensity lighting is available with a variety of lamp head assemblies. The lamp heads are engineered for maximum heat dissipation and lens integrity.

Lamp heads are equipped with appropriate stainless-steel hardware, painted with Hi-Temp white, baked powder coated urethane finish, and outfitted with a "rough service" bulb, extending bulb life. Heat resistant handles for convenience in positioning the lamp, most TELE-LITE lamp heads do NOT require tools or locking devices for adjustment.

LAMP HEAD FEATURES:

- Heat tempered glass lens
- Tilt and rotation adjustments
- Water and heat resistant handle
- Shock-resistant "rough service" bulb
- Single, double and offset configurations
- Hi-Temp White, baked powder coated urethane finish

Now available in LED



LED FT-SL-15
11.75"W x 7.5"H x 5"D



DOUBLE 12V MODEL (2) 12/FS
Flood/Spot 16.5"W x 9.5"H x 5.5"D



***NEW*
LED**

SINGLE LED Model TL6
8.5"W x 8.5"H x 5.5"D



FR LOW PROFILE
10"W x 4-7/8"H x 3-5/16"D



LED RETRO-FIT
8.5"W x 8.5"H x 5.5"D



LED SURFACE MOUNT
10.5"W x 8.5"H x 2.75"D




RIGHT & LEFT OFFSET BRACKET
Shown with Model 5TL Lamp Head Assembly.

Are you refurbishing an old truck or customizing a new one? TELE-LITE poles are just the ticket.

You can install your own light or order complete with one of ours. With so many options and mounting brackets available, TELE-LITE has the solution to your telescoping needs. Manufactured to the highest standards, our TELE-LITE poles are heavy duty aluminum that is polished, etched and anodized. Stainless steel is also available. Our standard extension length is 4' and custom lengths are no problem. **OTHER APPLICATIONS:** • Rotating/Warning lights for Command Centers • Antenna Masts for Thermal Imaging Cameras • Weather Stations and Remote Cameras

TOP RAISE POLES

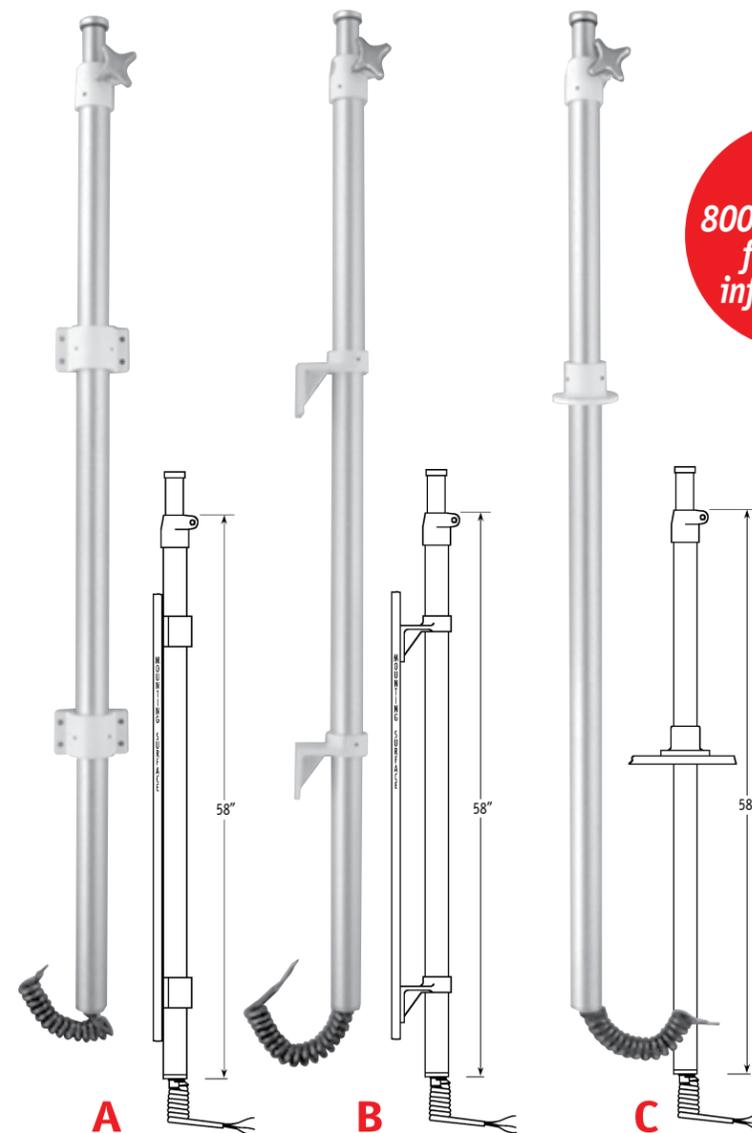

FLUSH MODEL A-4

Flush Mounted Top Raise Pole. Mounting Bracket information is on facing page.

OFFSET MODEL B-4


Offset Mounted Top Raise Pole shown with 2" Brackets. Offsets available are 1/2", 1", 2", 4" or 6".

THRU DECK MODEL C-4

Top Raise Pole. Thru Deck Mounting bracket.

Call
800.538.0022
for more
information

BOTTOM RAISE POLES

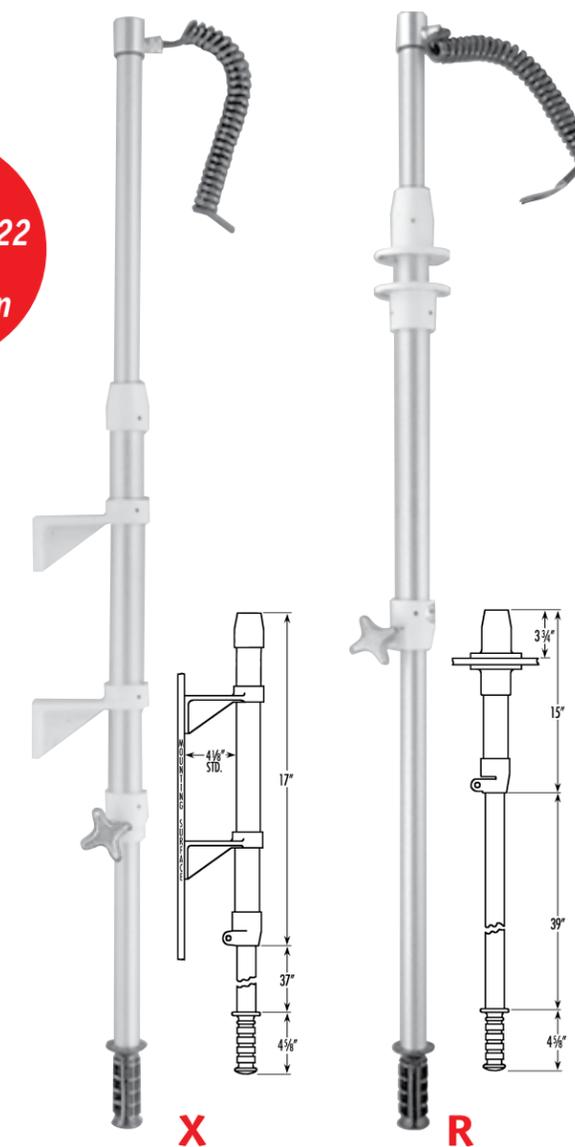

OFFSET MODEL X-4

Bottom Raise Pole. Offsets available are 1/2", 1", 2" 4" (shown), or 6". Optional cord exit thru grip at no additional charge.

THRU ROOF MODEL R-4


Bottom Raise Pole with Thru Roof "Sandwich" Mounting Brackets. Optional cord exit thru grip at no additional charge.

Available Bulbs	Bulb Type/Watts	Amp Draw	Lumens
LED-120V	100	1 Amp @ 120V	15,000
LED-240V	100	.42 Amp @ 240V	15,000
LED-12V	100	8.3 Amp @ 12V	15,000
Quartz Halogen	150	12.5 amps @ 120 V	2,400
	150	12.5 amps @ 24 V	2,950
	300	12.5 amps @ 120 V	5,900
	300	2.5 amps @ 240 V	5,900
	500	4.2 amps @ 120 V	10,500
	500	2.1 amps @ 240 V	10,500
Quartz Halogen IR	750	6.3 amps @ 120 V	19,500
	750	3.2 amps @ 240 V	19,500
	1000	8.3 amps @ 120 V	22,000
	1000	4.2 amps @ 240 V	22,000
	1500	12.5 amps @ 120 V	35,000
	1500	6.3 amps @ 240 V	35,000
Sealed Beam Dual Filament	2000	8.3 amps @ 240 V	44,000
	650	5.5 amps @ 120 V	25,200
	900	4.2 amps @ 120 V	32,000
Sealed Beam Dual Filament	100	8.3 amps @ 12 V	200,000 CP

Other bulbs available.

High quality, total versatility, with uncompromised ruggedness. Cast and machined by Corbett-Steeves Pattern Works, Inc., the sister corporation and birthplace of TELE-LITE, Inc., we track the quality of these mounting brackets at every step. This relationship also allows us to engineer custom bracketing for special situations. Call our engineering staff with your problems.

FLUSH MOUNTING TO A VERTICAL SURFACE

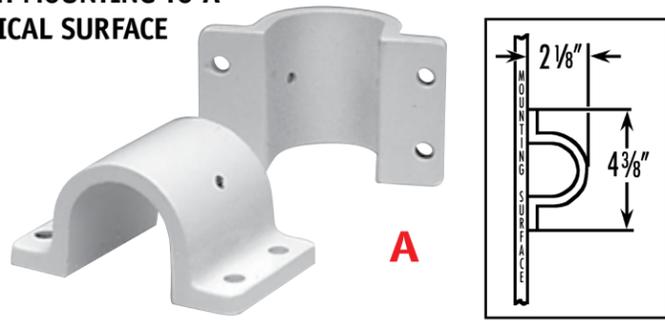

A



SC-310

3" X 3" SQUARE DECK MOUNT



DETACHABLE, NON-TELESCOPING VERTICAL SURFACE MOUNT

Allows for removal and storage.


SNK

OFFSET MOUNTING BRACKETS FROM 1/2" TO 6" OFFSET




B

THRU DECK MOUNTING BRACKET

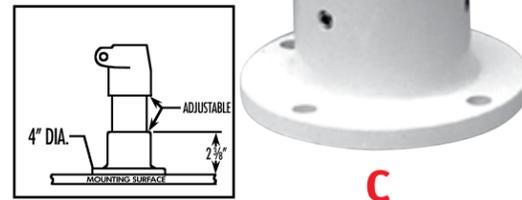

C

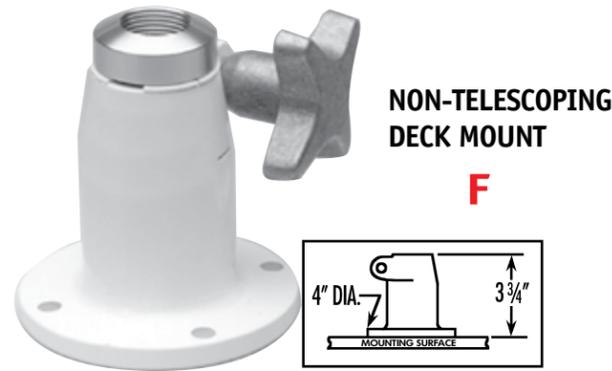

NON-TELESCOPING DECK MOUNT

F



NON-TELESCOPING VERTICAL SURFACE MOUNT

G

NEW POLES

- Stainless Steel
- Smaller Diameter - Fits where standard poles won't (e.g. extrusions)
- No rust, non-corrosive
- Standard length of 4', custom lengths available

NEW CASTING

- Smaller - more compact
- Three bracket styles allow you to construct any configuration
- Allows almost an additional foot of extension
- Only one bracket and four holes necessary for attachments. SAVES MOUNTING TIME!
- Water-tight seals
- Space-age technology for smoother raising and lowering

NEW INDICATOR SWITCH


- An option which allows you to make the light compliant with NFPA 1901-9-11
- Switch and wiring concealed in the bracketing. No exposed parts!

NEW LIGHT HEAD

- 500W but more economical
- LED - 12V, 24V & 110V

OPTIONS

- Indicator switch
- Color (Standard White or Classic Black)
- Other head configurations
- Custom lengths
- Handle cup
- Choice of cord exits

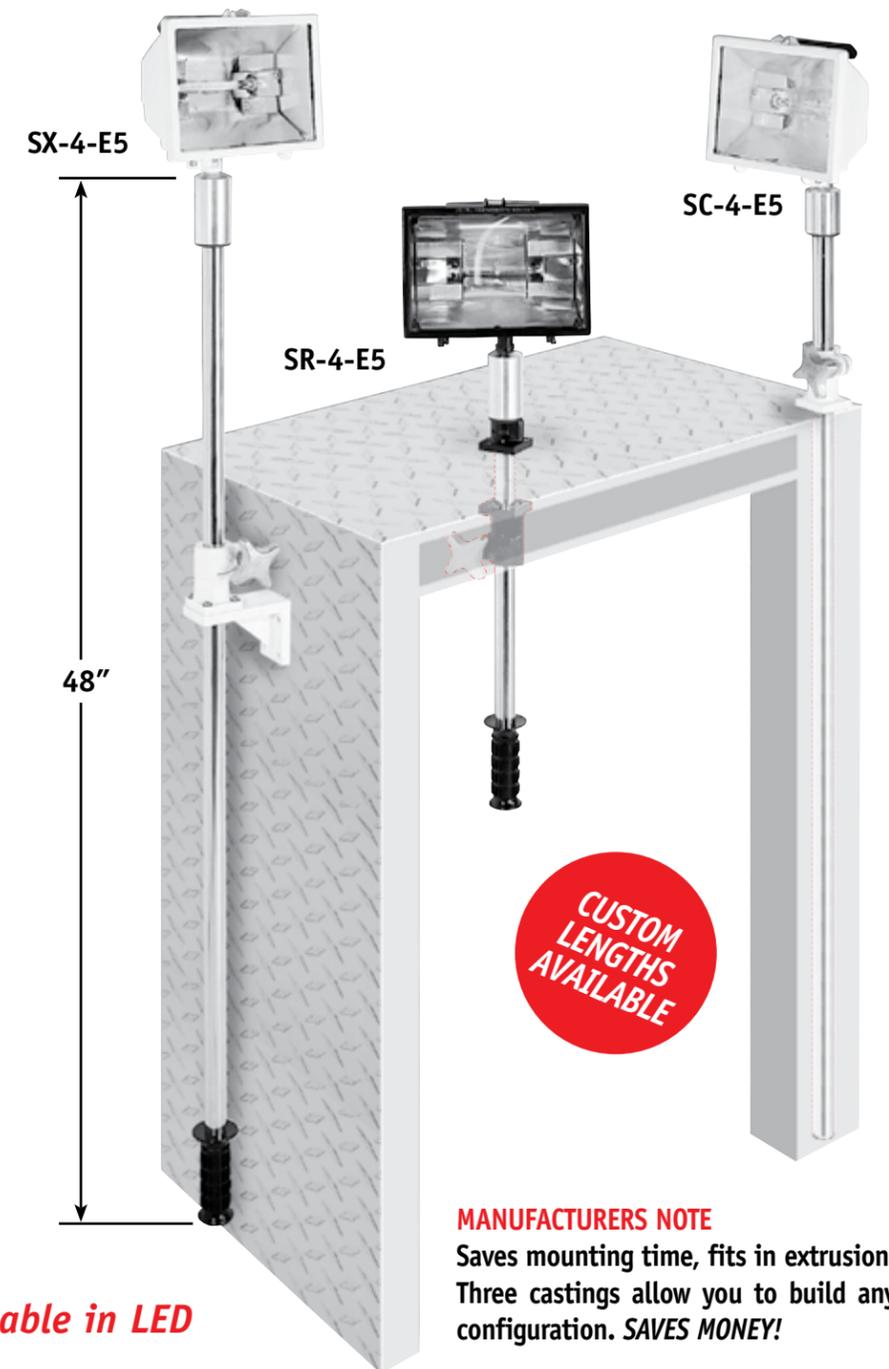

MANUFACTURERS NOTE
Saves mounting time, fits in extrusion. Three castings allow you to build any configuration. SAVES MONEY!

Now available in LED



Hardware (closed end & restraint)



Top raise - compartment



Bottom raise - roof



Bottom raise



Optional cup for support

TELE-LITE PORTABLE TRIPODS

Versatile, telescoping tripods can stand alone or mount to a vehicle. They are lightweight and fold for storage. Tripods are available with any TELE-LITE lamp head assembly. TELE-LITE portable floodlights attach to tripods with optional bracketing.


TELE-LITE PORTABLE TRIPODS FEATURE:

- Extended height—over 8'
- Standard L5-15 electrical connectors
- Cord attachment to base of pole for stability
- Vehicle mounting brackets available
- Custom lengths available


MODEL TT
Tripod
w/PA-P
Set up with
Model 5TLQ
Portable
Floodlight w/
PA-R (Runners)



MODEL TT w/PA-P
Folded height 61"

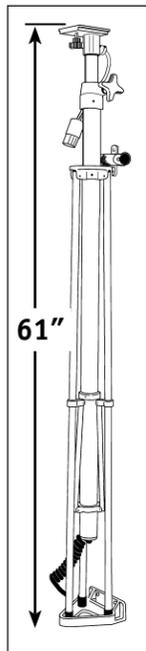

MODEL PA-R
(Runners)
(Adapts portable
fixture to tripod)




Model TT-(2)TL6



Model TT-5TLQ
Tripod Extends to
over 8' high.



Model TT-5TLQ w/TTVM
Folded height 72"

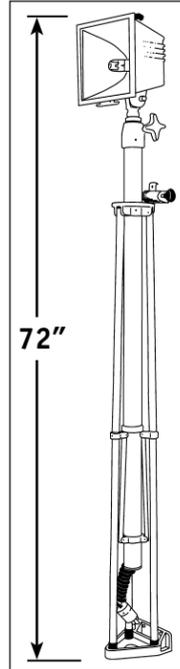

NOW AVAILABLE IN LED

MODEL TTVM
Vehicle Storage
Mounting Brackets



TELE-LITE PORTABLE FLOODLIGHTS

Lightweight, compact portable floodlights are easy to transport, store, and quick to set up. Instant quartz halogen illumination.

Portable Floodlights Feature:

- Rugged aluminum castings
- All stainless steel hardware
- Protective grid is standard
- Water and heat resistant handle
- Hi-Temp white baked powder coat finish
- Folds for compact storage
- NEMA L5-15 plugs are standard

Options:

- Storage brackets
- Ladder/door bracket
- Tripod attachment



Model P-5TLQ
Folded size:
Approx. 8-3/4" x 12" x 8"



Model PR-5TLQ, Recessed Inlet/Outlet



L5-15 standard, these configurations available.




Model P-5TLQ,
Recessed Inlet

NOW AVAILABLE IN LED

PORTABLE FLOODLIGHT BRACKETS



MODEL PA-R (Runners)
(Adapts portable to Tripod Model TTw/PA-P)



MODEL PB-LB
Ladder/Door Bracket



MODEL PB-103 (shown)
Bracket Set for deck and wall storage.
MODEL PB-104
Bracket Set for overhead storage.





Model P1-5TLQ, Pigtail

TELE-LITE RECESSED LIGHTS

TELE-LITE's Recessed Light fixtures feature the same advantages as all of our light fixtures; rugged aluminum castings, all stainless steel hardware as well as heat tempered glass lens.



MODEL TLRL-10/15
Available in 1000/1500 watt, 120/240 Volts.



MODEL TLRL-5
500 watt,
120 volts.



TEU-1.LEDTL6

***NEW* LED**
Call for details

Power & Light Where you need it

Honda generators, legendary for performance and reliability, power both the TEU1000D and TEU2000D. With Quartz Halogen lamps that fold for stowability, TELE-LITE offers a variety of lamp wattages and styles to meet your portable lighting needs.



	EU2000i	EU1000i
Engine	3.5HP	1.8HP
AC Output 120V	2000W max. (16.7A) 1600W rated (13.3A)	1000W max. (8.3A) 900W rated (7.5A)
DC Output	12V, 96W (8A)	12V, 96W (8A)
Fuel Tank Capacity	1.1 gallons	0.6 gallons
Noise Level	59dB @ rated load	59dB @ rated load

- **CLEAN POWER**— run sensitive electronics
- **ECO-THROTTLE TECHNOLOGY**— long running time
- **PARALLEL OPERATION**— optional linking doubles power
- **SUPER QUIET**— 59dB (normal speech is 60dB)
- **SIMULTANEOUS AC/DC**

Model	LAMP	LUMENS	DIMENSIONS (LxWxH)	COMB. WT.	KIT WT.	RUN TIME
TEU-1000DB	500W	over 10,500	24 x 9.4 x 14.9	38 lbs	8 lbs	4- 8.7 hrs.
TEU-1.75DB	750W	over 16,000	24 x 9.4 x 14.9	38 lbs	8 lbs	4-8.7 hrs.
TEU-1.LEDTL6	LED	over 15,000	24 x 9.4 x 14.9	38 lbs	8 lbs	4-8.7 hrs.

Model	LAMP	LUMENS	DIMENSIONS (LxWxH)	COMB. WT.	KIT WT.	RUN TIME
TEU-2200DB	500W	over 10,500	26.5 x 11.5 x 16.7	60 lbs	10 lbs	4- 15 hrs.
TEU-22.75DB	750W	over 16,000	26.5 x 11.5 x 16.7	60 lbs	10 lbs	4-15 hrs.
TEF-22.10NYPD	1000W	over 22,000	28.2 x 15 x 16.7	60 lbs	10 lbs	4-15 hrs.
TEU-22.LEDTL6	LED	over 15,000	26.5 x 11.5 x 16.7	60 lbs	10 lbs	4-15 hrs.



TEU-2200DB



Dual Parallel Cable Set
06321-ZT3-C30AH



TEU-22.LEDTL6

NOW AVAILABLE IN LED

NOVA-LITE Powerful and portable

The near perfect combination of power and portability, NOVA-LITE features the dependable Honda EB-3000 generator with GFCI and a run time of 6 to 9 hours. All with power to spare.

The handcart, custom built for easy and fast portability, has two 500W Quartz Halogen TELE-LITE's mounted on telescoping poles for instant use. Raise them up to 82" from the ground, rotate and angle them to get the light exactly where you need it. Two more 500W Quartz Halogen TELE-LITE's are rack mounted on the backside of the cart, for a total of 2000 watts of brilliant quartz halogen lighting

At only 154 lbs. NOVA-LITE is easy to maneuver with its large wheels and rugged off-set stainless steel handle.




Two 25 Ft., 10/3 SJ00W Extension Cords with molded plugs included with the Nova-Lite.

NOW AVAILABLE IN LED

• Front facing 3 prong outlets let you connect additional lights quickly.

• Low center of gravity, rack mounted Honda EB-3000 generator has all controls, both engine and electrical, on one convenient panel.

ANATOMY OF A WINNER.

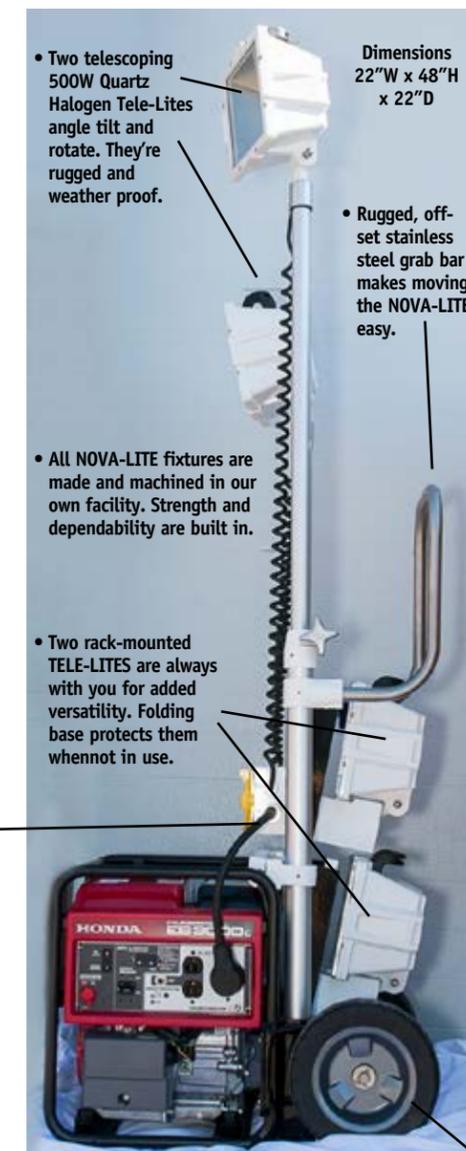

• Two telescoping 500W Quartz Halogen Tele-Lites angle tilt and rotate. They're rugged and weather proof.

Dimensions
22"W x 48"H
x 22"D

• Rugged, off-set stainless steel grab bar makes moving the NOVA-LITE easy.

• All NOVA-LITE fixtures are made and machined in our own facility. Strength and dependability are built in.

• Two rack-mounted TELE-LITES are always with you for added versatility. Folding base protects them when not in use.

• Rugged, large wheels for mobility.

SPECIFICATIONS

Honda EB3000C Generator: Honda 4-stroke OHV 6.5HP Engine, Oil Alert, Electronic ignition, Circuit breakers, Fuel Meter, CycloConverter, USDA spark arrestor/muffler, Noise level of 68dB 120v 3000w max AC output (25A), 2.7 gal. fuel tank, 6-9hrs runtime

NOVA-LITE: (2) Tele-Lite 500w Quartz Halogen Telescoping Lights, (2) Tele-Lite 500w Quartz Halogen Portable Lights, (2) L5-15 receptacles with weather resistant cover, (2) 25Ft Yellow 10/3 SJ00W Extension Cords, 22"x27"x48", 154lbs.

FEATURE UP GRADES:

- PR-5 Portable Lights w/receptacle
- 750w Quartz Telescoping Light
- Extension Cords: 50 & 100 Ft lengths
- Std. L5-15 plugs, others available
- LED Lamp heads- Telescoping & Portable Lights

**GET MORE POWER WITH OUR NEWEST ADDITION
NOVA-EU7000, CALL FOR DETAILS.**

HONDA PORTABLE PUMPS have earned a reputation throughout the world for being dependable, easy to use and rugged enough to meet the demands of agricultural, rental, construction, and fire fighting applications.

Honda Lightweight, Standard, and High Pressure pumps are designed for moving clear, clean water from one place to another. Typical applications include irrigation, flood control, light construction, fire fighting and swimming pool draining.



Trash

Honda offers five models of trash and diaphragm pumps for heavy-duty commercial and agricultural applications. WT series trash pumps offer a full tubular frame, cast-iron impeller and volute, long life silicon carbide-ceramic water seal and lightweight cast aluminum pump housing. WDP series diaphragm pumps are designed to move waste water containing up to

2.4" diameter solids for a variety of residential and commercial applications. Housed in rugged stainless steel casings, the WSP series offers automatic starting, builtin thermal auto reset and heavy duty 115v cord.



Diaphragm



Standard



Submersible



Lightweights



High Pressure

Portable, Fuel Efficient and Powerful HONDA FOUR-STROKE OUTBOARDS:

- Super quiet
- Fuel-efficient & dependable
- Ranked #1 by four-stroke owners
- Offer the best outboard warranty available
- Come in models ranging from 2 hp to 225 hp



Deluxe

PORTABLE ELECTRIC POWER continues to grow in popularity as more and more electronic devices and appliances become an important part of our lives both at work and home. For over 35 years, Honda generators have set the industry standard for portable generators with the most extensive model selection for a variety of commercial and consumer applications.



Super Quiet



Economy

Legendary in performance, rugged and durable, Honda has a complete line of generators to fit your needs. The Lightweight series are just that. They can be carried with one hand. The Economy series offers a "no-frills" power source and the Deluxe series come standard with optional electric start and many convenience features.

A stable, clean power source is provided by Honda's line of Inverter generators, while the Industrial series has a reputation of being incredibly rugged and reliable. For safety, G.F.C.I. is standard.



Inverter

Mobile & Automatic Standby power

Whether you are looking for trailer mounted mobile units, vehicle mounted/diesel or PTO units, TELE-LITE is proud to offer a complete range of generators to meet your electrical needs.

We also carry a complete line of fully automatic LP/natural gas/diesel power stations for your fire station, municipal building or business.

TELE-LITE HAS THE SOLUTION TO YOUR POWER NEEDS.



Trailer and permanent models available in 18kW to 2000kW.



WITH THE COST of emergency vehicles spiraling upwards, it is important to make sure the investment in a new truck lasts years and years. The SABRE-VENT offers great protection at a rea-sonable price.

Years of design and manufacturing refinements make SABRE-VENT the trusted and most efficient method for preventing premature damage and reducing unsafe atmospheric work environments.

This powerful system circulates fresh air into every storage compartment of your vehicle while it is parked in the station. A programmable timer is prewired for shoreline power.

Consisting of a 400 c.f.m. blower unit which forces air through a loop of 1-1/2" perforated PVC pipe, the SABRE-VENT provides 1,000-1,300 daily air changes per

compartment. The closed loop concept assures a con-sistent air flow. SABRE-VENT is supplied in kit form and can be installed on new or existing equipment.

SABRE-VENT can be designed to provide venting for virtually all makes and sizes of chassis styles. Because of its efficiency in fighting corrosion damage caused by water and condensation, SABRE-VENT pays for itself within a short time by reducing or eliminating costly repairs or replacement.

- Helps prevent rusting of compartments
- Lessens chance of buildup of volatile and noxious fumes
- Diminishes damage and odors.




Dimensions
13-1/8"W x 16-5/8"H x 26-5/8"D
Motor: 115V 60HZ, 2.3A, 1550RPM 1/12HP

Curved fittings won't restrict smooth flow of air

Closed loop design provides even circulation, front to back, top to bottom

SABRE-VENT fits all popular styles and sizes of trucks

Blower unit mounts vertically or horizontally

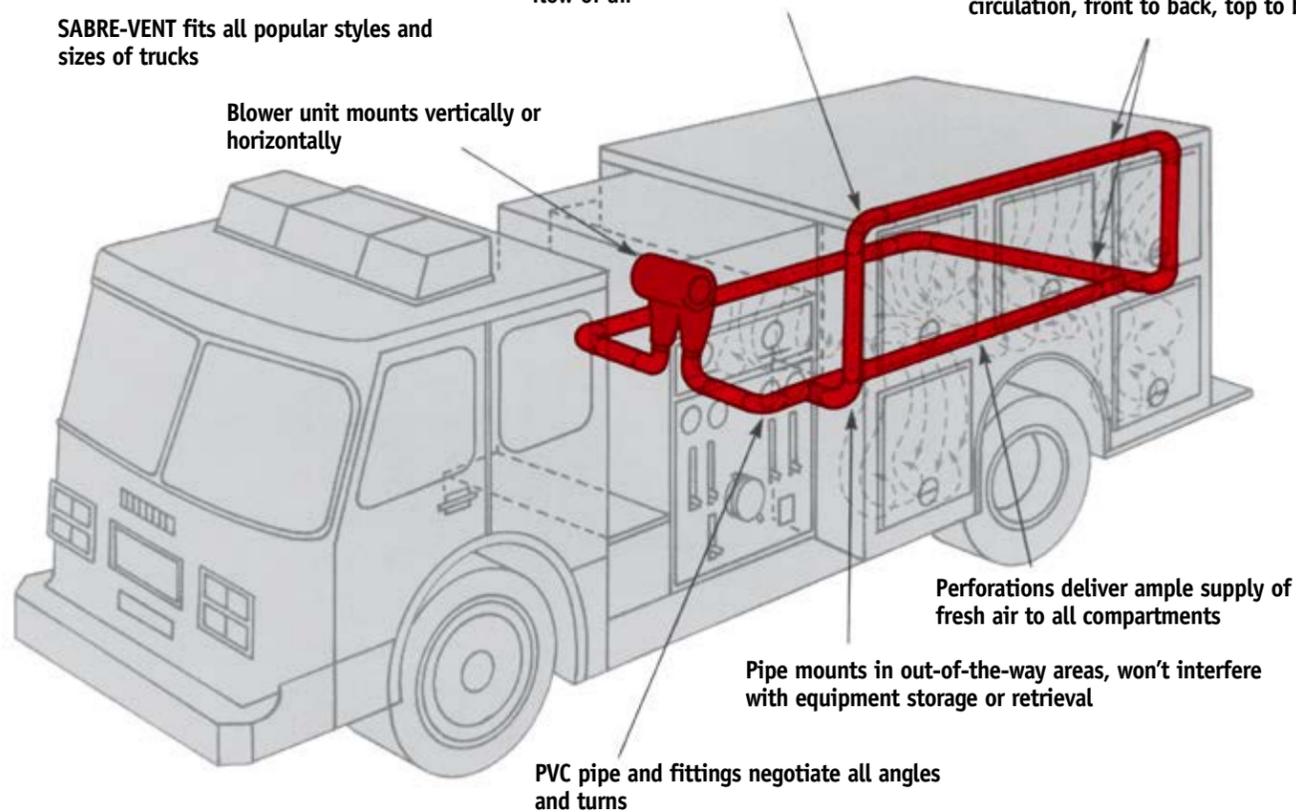

Positive Pressure Fans

Designed to provide the best value for fire & industrial applications. Direct-drive design allows for a more compact, lighter weight package, powered by Honda Engines, insuring performance and reliability. Protected with Honda Oil Alert.

Standard features:

- Quick set-up, no power cords or generators
- Side Exhaust Outlet & Oil Alert
- Optional Exhaust Extension Hose
- Optional Universal Mister Kit
- Tubular Steel Frame

GASOLINE POWERED



HONDA ENGINES

Model	CFM	H.P.	Dimensions	Wgt
TLAP-16B	12,008	3.5	20.5" x 19.75" x 21.75"	67 lbs
TLAP-21B	20,152	5.5	25" x 20.5" x 26.25"	81 lbs

ELECTRIC - VARIABLE SPEED

Designed with a variable speed GFI compatible motor, this fan delivers precise control of airflow. The sealed, water resistant Control Module and Air-Over Cooled Motor, can be operated in wet and negative pressure situations. The Control Module eliminates start-up power surge, allowing the fan to operated on a generator as small as 2,000w.



Standard features:

- Dial Control
- Water Resistant
- No Startup Amp surge
- No Carbon Monoxide

Model	CFM	H.P.	Dimensions	WGT	Running Amps/Watts
TLAPVS-16B	10,650	1/2 hp	21" x 19.75" x 21.75"	62 LBS	2000/816
TLAPVS-21B	11,475	1/3 hp	26" X 21" X 26.25"	81 LBS	2000/816

FAN- GENERATOR- LIGHT COMBINATION PACKAGES AVAILABLE

Universal Mister Kit

Attaches directly to the outlet guard and directs a fine vapor mist into the discharge of a Smoke Ejector or Positive Pressure Fan. The mist evaporates, reducing the ambient air temperature. Perfect for personnel rehabilitation.



Standard features:

- Attaches to virtually any fan
- Uses 2 gallons of water per hour
- Connects to standard 3/4" garden hose*
*requires 45 to 65 psi for operation

Smoke Ejector Fans

Designed to meet fire service needs. Available in various sizes to satisfy almost any application.

Accessories available:

- TLAHB Hanger Bar
Fits 24" to 60" opening
- TLAHH Hanger Hooks
- TLAMK Universal Mister Kit

Standard feature

- 10' 14/3 500W Power Cord with Molded 5-15 Plug



Model	CFM	Dimensions LxWxH	H.P.	Wgt.	Starting/Run Watts
TLAS-12S	2750	15-1/2 x 15 x 13	1/2	40	2000/800w
TLAS-16S	3200	19-1/4 x 18-3/4 x 13	1/3	44	2000/700w
TLAS-16XP*	3200	19-1/4 x 18-3/4 x 13	1/3	49	2000/700w
TLAS-20S	6700	25-1/2 x 24-3/4 x 16-1/4	1	85	4000/1500w
TLAS-20XP*	6700	25-1/2 x 24-3/4 x 16-1/4	1	93	4000/1500w

*XP=Explosion Proof Motor Frame Construction. Motors are UL rated, but not the entire Fan Assembly.

Serious Equipment for Serious Training

- **FIRE FIGHTING TRAINING** - Search and Rescue, SCBA, PPV
- **PUBLIC EDUCATION** - Fire Safety Training
- **TESTING** - PPV product evaluation & comparison.
Air flow and wind tunnel applications



Features:	Battle Fogger	Premier Fogger	G-3000
Micro Processor Controlled	X	X	X
Continuous Fog Output	X	X	X
Heavy Duty Powder Coat Chassis	X	X	X
Electro-Mechanical Over Temp Protection	X	X	X
Integrated Fluid Reservoir	1 Gal	1.72 Gal	1 Gal.
Rapid Change Heat Exchanger	X	X	
Illuminated Fog Ready Switch on Remote	X	X	Digital
Full Function Timer Remote Control	X	X	X
25' Cable	X	X	X
Heat Exchanger Replacement Kit	X	X	
Cast Heater for improved heat transfer		X	
On-Board DMX Control		X	X
DMX Thumbwheel Selector		X	
Accessories:			
Road Case	Option	Option	Option
Remote Extension Cable	Option	Option	Option
Truss Hanging Bracket	Option	Option	Option
4" Ducting Hose Adapter			Option
LSG Internal Module			Option
Silencer Kit			Option
DMX Interface/Remote			Option
Specifications:			
Dimensions: LxWxH	22-1/2x9-3/8x9-1/2	21" x 10" x 9"	23-1/2x8-1/2x11-1/2
Net Weight / with Fluid	25/35 lbs	39/39 lbs	43 lbs
Heater Watts	12 amps	12 amps	18 amps
Output:			
Fog Run Time	Continuous	Continuous	Continuous
Cubic Feet/Min @ burst output	7560 @ 1 meter visibility	8900 @ 1 meter visibility	19000 @ 1 meter visibility
Fluid Consumption	2 oz/min	2 oz/min	9.4oz/min



SMOKE FLUID

Smoke fluid is stocked in two formulas; TELE-MAX, which is our standard mix and TELE-PRO, which has an extended hang time of 2 to 3 times that of the standard mix. Packaged (4) one gallon containers per case. Available in 5, 20 and 55 gallon containers to meet all your training requirements and consumption needs.

Stop the flow of water without shutting down the whole system

CONTROLLING WATER DAMAGE IS IMPORTANT.

The universal SPRINKLER STOP, a simple, dependable tool, is designed to fit into recessed sprinkler heads and quickly stop the flow of water. The SPRINKLER STOP valve allows fire crews to stop water damage from occurring without disabling the entire system. The crew is then free to attend to other tasks such as evacuation of the building, ventilation, or starting salvage & overhaul operations.

To stop a specific sprinkler, simply push the rubber stop into the opening of the sprinkler head. Turning the threaded handle tightens the gasket and stops the water flow. Easy to carry, easy to use, SPRINKLER STOP is a great tool to limit water damage. You should have several available on each truck. Your TELE-LITE representative can help. Call 1-800-538-0022



- Only 6-3/4" long.
- 10 ounces.

The SPRINKLER STOP easily fits into a firefighter's coat Pocket, a spare sprinkler Head box or a Maintenance tool box.



A must for fire departments & maintenance crews

ADAPTERS AND EXTENSION CORD SETS



NEMA CONFIGURATION ADAPTERS

Make quick, secure connections between straight blade and locking plugs/connectors. Compact size.

- Heavy-duty non-conducting housing & solid brass blades
- Available in (4) of the most popular configurations


EXTENSION CORD SETS

Heavy duty Yellow, 10/3 SJOW with Molded Plug

- Available in (3) Lengths: 25, 50 and 100 Ft.
- Various plug configurations are available.

Part Number	Length	Plug
XCORD-100.5-15	100 Ft	5-15
XCORD-100.L5-15	100 Ft	L5-15
XCORD-100.L5-20	100 Ft	L5-20
XCORD-50.5-15	50 Ft	5-15
XCORD-50.L5-15	50 Ft	L5-15
XCORD-50.L5-20	50 Ft	L5-20
XCORD-25.5-15	25 Ft	5-15
XCORD-25.L5-15	25 Ft	L5-15
XCORD-25.L5-20	25 Ft	L5-20

Part Number	NEMA Configuration		Description
	Male	Female	
TL05-1705			Male 15A, 125V twist (L5-15P) to 20A, 125V straight (5-20R)
TL05-1712			Male 15A, 125V straight (5-15P) to 15A, 125V twist (L5-15R)
TL05-1740			Male 20A, 125V twist (L5-20P) to 20A, 125V straight (5-20R)
TL05-1744			Male 15A, 125V straight (5-15P) to 20A, 125V twist (L5-20R)

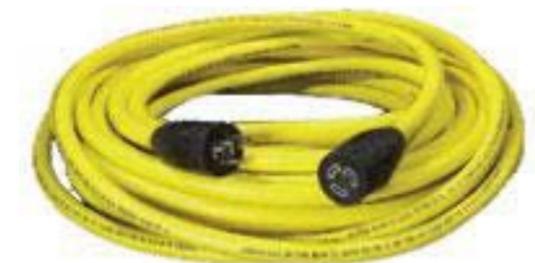



The Original

TELE-LITE[®] INC.

ROCHESTER, NEW YORK

80 Lowell Street, Rochester, New York 14605-1831
(800) 538-0022 • (585) 546-7143 • FAX: (585) 546-6157
WEB SITE: www.tele-lite.com